



STRIP CUTTER

The powered strip cutter is a great economical option for cutting straight lines only.

Processing Capabilities

Sizes: From 48" to 132"

Glass Thickness Range: 1-6mm

Bridge and Head Drive: Pneumatic Cutting Head

Volume: Low to Mid

Technical Specifications

Table Height: 36"

Cut Path Tolerance: ± 0.030

Electrical Requirement:

1/4 HP motor, 120VAC single phase motor

Industries

Architectural, Shower Doors, Specialty

Key Advantages

Affordable: Ideal price point for low volume glass companies cutting straight lines only

Dual Axis Cutting: Can be configured to cut both the X and Y axis

Multiple Cutting Heads: Additional heads can be added to the bridge

Common Optional Features

Additional Cutting Heads

Additional Guide Rail

Caster Wheels


Supporting Equipment

Air Float Load Tables

Air Float Breakout Tables

Transfer Conveyors

Caster Tables

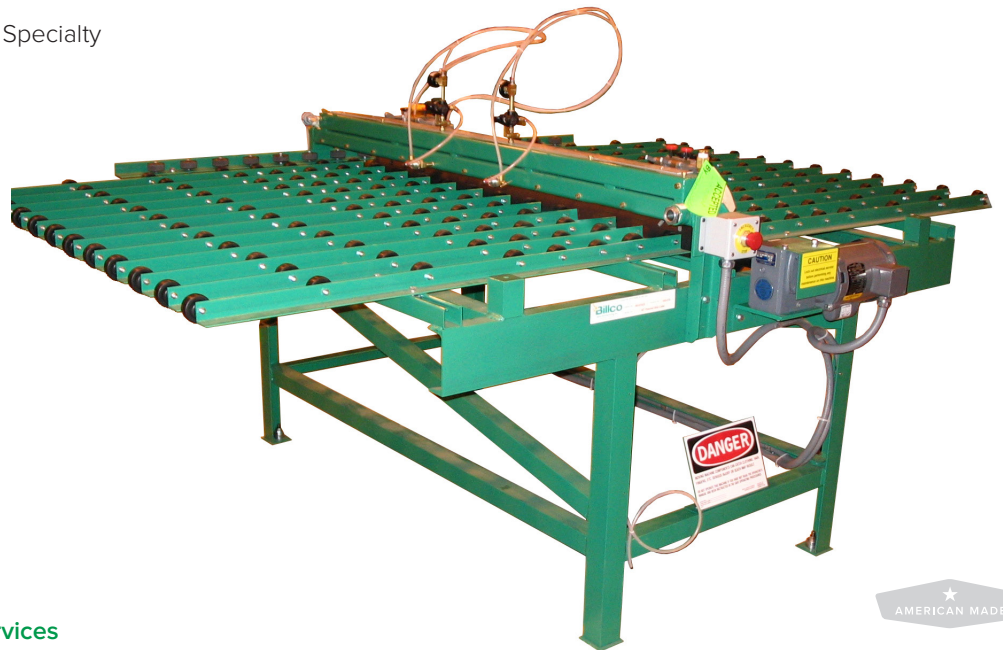

ON CALL

24 | 7 | 365

Billco Services

Our Solution Specialists, 24-7-365 Technical Support, and Replacement Parts Team are fully dedicated to keeping your line moving. Call or visit our website for more information.



724.452.7390
SOLUTIONS@BILLCO-MFG.COM
BILLCO-MFG.COM

R8.2017