



Billco Teams

A Distribution & Service Company

TILTING BREAKOUT TABLE

DESCRIPTION

The Tilting Breakout Table is designed for manual breakout of cut glass sheets and for loading and unloading large glass sheets. The hydraulic tilting system provides easy positioning, while pneumatic breaker bars in the X and Y directions efficiently break cut glass and are operator-controlled by foot pedal. The table surface is covered with protective felt, allowing glass to move easily while minimizing the risk of damage.

HIGHLIGHTS

- ✓ Minimum Surface Friction with Air Cushion System
- ✓ Extended Felt Lifespan

SPECIFICATIONS


-  145" x 100" (3700 x 2550 mm)
236" x 126" (6000 x 3210 mm)
MAX GLASS SIZE
-  3-19 mm
GLASS THICKNESS
-  2+1 or 3+1
BREAKING BARS
-  1x3 kW or 2x3 kW
BLOWER





TECHNICAL SPECIFICATIONS

	CKM3700	CKM6000
W	108.27" (2750 mm)	137.80" (3500 mm)
L	165.35" (4200 mm)	275.59" (7000 mm)
H	37.40" (950 mm)	37.40" (950 mm)
H1	116.14" (2950 mm)	153.54" (3900 mm)

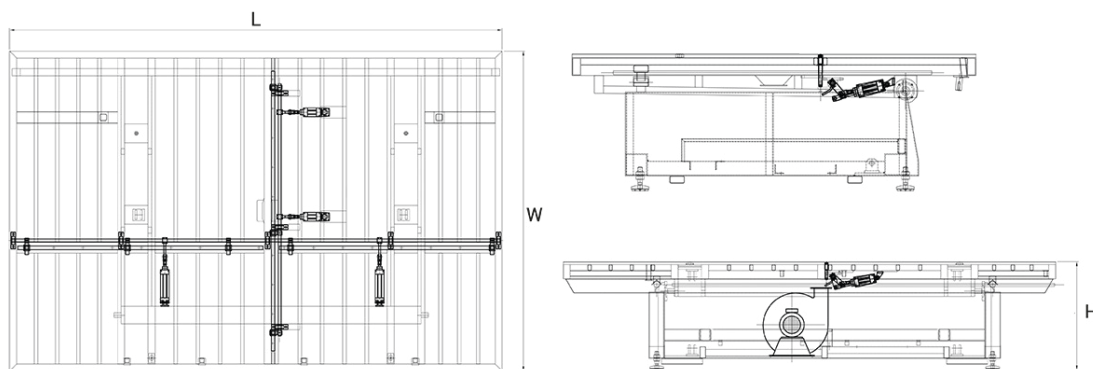

FEATURES

AIR FLOTATION SYSTEM

Creates a cushion of air that reduces surface friction, allowing glass to move smoothly across the table while minimizing the risk of scratches.

UNIFORM AIR DISTRIBUTION

An air distribution tray that provides even airflow across the entire surface, ensuring stable support and effortless glass handling.

PNEUMATIC BREAKING BARS

Breaking bars in both the X and Y axes provide fast, accurate separation of cut glass for efficient manual processing.

HIGH-PERFORMANCE FAN SYSTEM

A vibration-balanced, high-flow fan delivers consistent air pressure for reliable air flotation and smooth glass movement.